

EP771

Elegant Enhancement to Video Projection



The Elegant and Bright Multimedia Solution


The Optoma EP771 redefines the multimedia data projector category. With built-in audio, 3000 lumens, a 2300:1 contrast ratio and a sleek new form factor, the EP771 takes bright and powerful to the next level. An elegant solution for multimedia presentations, Optoma's EP771 can be classified as a true statement of video enhancement.

- Bright at **3000 ANSI lumens** with **2300:1 contrast ratio**
- Native **XGA (1024 x 768)** with support up to **SXGA+ (1400 x 1050)**
- Sleek new design and transportable at 7.3 lbs
- Fully featured remote with laser pointer and mouse
- Recessed focus and zoom controls eliminate accidental adjustments
- Exceptionally long lamp life - up to 4000 hours

 **Optoma**

www.OptomaUSA.com


Advanced DLP® Technology

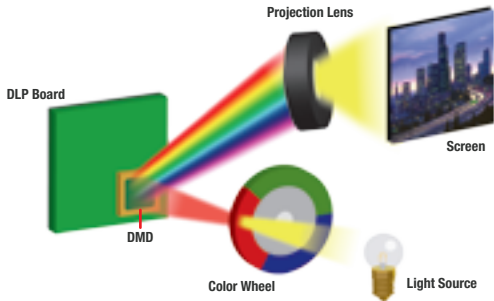

Remote Control



I/O Ports

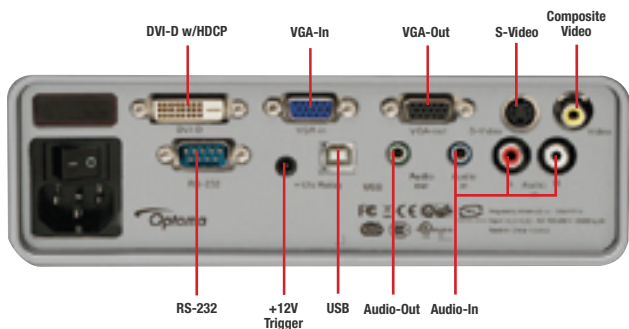

Specifications

Display Technology:	Single 0.7" DDR DLP® Technology by Texas Instruments
Resolution:	XGA (1024 x 768)
Maximum Resolution:	SXGA+ (1400 x 1050)
Brightness (Typical):	3000 Lumens
Contrast Ratio:	2300:1 (Full On/Full Off)
Lamp Life (Bright/STD/ECO):	2000/3000/4000 Hours
Lamp Type:	230W SHP
Image Size (Diagonal):	27.5" to 306" (0.7 to 7.8 m)
Noise Level (Bright/STD/ECO):	33dB/30dB/28dB
Remote Control:	Fully Featured IR Remote with Laser Pointer and Mouse
Monitor Loop Through:	D-Sub 15 VGA Output (Functional in Both Normal and Standby Modes)
Throw Ratio:	1.8 to 2.1:1 (Distance/Width)
Projection Distance:	3.2' to 32.8' (1.5 to 12 m)
Computer Compatibility:	SXGA+, SXGA, XGA, SVGA, VGA, PC & Macintosh Compatible
Video Compatibility:	NTSC (M, 3.58/4.43 MHz), PAL (B, D, G, H, I), SECAM (B, D, G, K, K1, L), HDTV (480p, 576p, 720p, 1080i)
Aspect Ratio:	Native 4:3; 16:9 Compatible
Projection Lens:	F=2.6~2.81, f=26.01~29.84mm; 1.15:1 Manual Zoom
Audio:	One Internal 3-Watt Speaker
Weight:	7.3 lbs (3.3 kg)
Dimensions (W x H x D):	11.81" x 3.46" x 9.61" (300 x 100.5 x 244 mm)
Keystone Correction:	± 15° Vertical
Vertical Refresh Rate:	50 - 85 Hz
Power Supply:	AC Input 100-240V, 50-60Hz
Power Consumption:	290W, <5W Standby Power
Operating Temperature:	Operating: 5 to 35°C, 80% Humidity (Max) Storage: -20 - 60°C, 80% Humidity (Max)
Displayable Colors:	16.7 Million, 256 Shades of Gray
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	One Kensington® Lock Port
I/O Connectors:	VGA-In, DVI-D w/HDCP Composite Video, S-Video, Two Audio-In (RCA & Mini-Din), USB, RS-232, VGA-Out, Audio-Out, +12V Trigger
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Composite Cable, Remote Control, Batteries for Remote, Lens Cap, Carrying Case, CD-ROM User's Manual, Quick Start Guide and Warranty Card
Optional Accessories:	Bering Ceiling Mount, DVI to HDMI Adapter, Gold Service Warranty and GrayWolfII™ Series Screens
Warranty:	1 Year Limited Parts and Labor, 90 Days on Lamp
UPC:	796435 11 125 0

Data-771-001



Available from:

