

EX785 DLP® Projector

Powerful performance

- High brightness projector, astonishing 5000 ANSI Lumens
- Easy installation using lens shift. Centre lens design
- Optional lenses for a range of room applications
- Crestron RoomView® RJ45 control and monitoring
- Extensive Connectivity
- Environmentally friendly design <1W standby mode
- Optoma EX785 filter-free design virtually no maintenance




Powerful Installation Projector

The Optoma EX785 has almost limitless installation possibilities, its combination of high performance and brightness means it achieves perfect images in most environments. Using centre lens design, full lens shift and interchangeable lens options, the flexible and powerful EX785 is a truly versatile installation solution.

Boasting an astounding 5000 ANSI Lumens, perfect for conferencing facilities, large auditoriums, halls and bars, its true brilliance must be experienced. Meeting the highest standards of installation projectors, the EX785 creates seamless, smooth and radiantly bright corporate presentations, videos and movies.

LENS SHIFT

The EX785 handles a variety of installation challenges that come with large halls, conferencing facilities, auditoriums and bars. Lens shift aligns the projected images centrally on screen and can be adjusted horizontally or vertically without moving the unit.



RS232 CONTROL

The extensive RS232 command set makes it simple and easy to control the EX785 with any control system.

AMX Compatibility - Dynamic Discovery

Protocol is incorporated into the EX785. This feature allows for easy installation with AMX control systems.



EXTENSIVE CONNECTIVITY


This native XGA projector accepts a wide variety of computer and video input signals. Connectivity includes: 5BNC, HDMI, DVI-D, Component Video, dual VGA (with SCART and YPbPr support), S-Video and Composite.

Five audio inputs for individual PC and video connections enable the EX785 to function as an audio switcher and volume controller, thereby eliminating complicated and costly additional audio hardware and cabling.

CRESTRON ROOMVIEW® - NETWORK CONTROL

RoomView® software provides a custom configurable interface to monitor, manage and control every device in every room remotely from any computer.

- Manage up to 250 projectors at the same time (via master PC).
- Control and alter the projector settings using a simple web browser page, including OSD menu control.
- Set up email alerts for warning messages.
- Ideal for large installations in both in the educational and business environments.

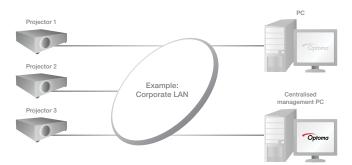



Download Crestron RoomView® Express software from: www.crestron.com/getroomview

EXTRA FEATURES

- Direct power on start up time is significantly reduced as standby mode is bypassed when the power cable is inserted into an active power outlet. This eliminates the need to use the 'Power' button on the remote control or the projector keypad.
- Auto power off if after a pre-determined time the projector does not receive a signal, it will turn itself off automatically, conserving power and extending the life of the lamp.
- Key pad lock once enabled, prevents unauthorised adjustments ensuring the projector can only be controlled via the remote control.
- +12v Trigger electric screen control
- Logo Capture customise your start up screen

LENS

The centred lens design allows greater flexibility, ensuring the projector can be easily installed.

OPTIONAL LENSES


Easily attached short and long throw lenses give you the option to install the EX785 in different sized locations.

The short throw lens with a throw ratio of 0.8:1 is ideal for rear-projection installations.

The STD throw lens with a throw ratio of 1.6 – 2.0:1 is ideal for standard installations

The long throw lens with a throw ratio of 2.0 – 3.0:1 is ideal for large conference rooms, auditoriums and any other large venue.

EX785 PROJECTION DISTANCE TABLES (4:3 ASPECT RATIO)

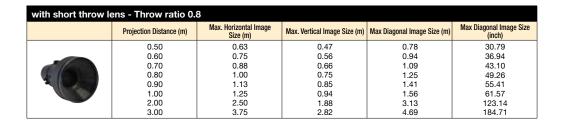


with STD Lens - Throw ratio 1.6 - 2.0							
	Projection Distance (m)	Max. Horizontal Image Size (m)	Min. Horizontal Image Size (m)	Max. Vertical Image Size (m)	Min. Vertical Image Size (m)	Max Diagonal Image Size (m)	Max Diagonal Image Size (inch)
	1.50 2.00 3.00 4.00 5.00 6.00 7.00	0.94 1.25 1.88 2.50 3.13 3.75 4.38	0.75 1.00 1.50 2.00 2.50 3.00 3.50	0.70 0.94 1.41 1.88 2.35 2.82 3.29	0.56 0.75 1.13 1.50 1.88 2.26 2.63	1.17 1.56 2.35 3.13 3.91 4.69 5.47	46.18 61.57 92.36 123.14 153.93 184.71 215.50

with long throw Lens - Throw ratio 2.0 - 3.0							
	Projection Distance (m)	Max. Horizontal Image Size (m)	Min. Horizontal Image Size (m)	Max. Vertical Image Size (m)	Min. Vertical Image Size (m)	Max Diagonal Image Size (m)	Max Diagonal Image Size (inch)
	2.00	1.00	0.67	0.75	0.50	1.25	49.26
	4.00	2.00	1.33	1.50	1.00	2.50	98.51
	6.00	3.00	2.00	2.26	1.50	3.75	147.77
	8.00	4.00	2.67	3.01	2.01	5.00	197.03
	10.00	5.00	3.33	3.76	2.51	6.26	246.29
	12.00	6.00	4.00	4.51	3.01	7.51	295.54
	14.00	7.00	4.67	5.26	3.51	8.76	344.80
	16.00	8.00	5.33	6.02	4.01	10.01	394.06
	18.00	9.00	6.00	6.77	4.51	11.26	443.31
	20.00	10.00	6.67	7.52	5.01	12.51	492.57

† 3D TECHNOLOGY

Using the inherent speed of DLP technology, The Optoma EX785 can output video and images at an astonishing rate of 120Hz, allowing you to show full screen, full colour, stereoscopic 3D. The 3D effect is generated by splitting this signal into two standard video streams, one for each eye. Using DLP® Link™ technology, the 3D glasses synchronise with the image on screen to filter each stream to the correct eye. Your brain then combines the two streams to make them jump into life.

The 3D features of the EX785 can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling software. Currently the EX785 does not support 3D TV broadcast systems, SKY in the UK or 3D Blu-ray, though support for these applications may be added in future using additional hardware.



PROFESSIONAL[†]

EX785 SPECIFICATIONS

Brightness ¹	5000 ANSI Lumens				
Contrast Ratio	2000:1				
Native Resolution	XGA 1024 x 768				
Compressed Resolution	Up to UXGA (1600 x 1200)				
Noise Level	30/32dB (STD/BRIGHT mode)				
Display Technology	0.7" XGA DC3 DLP® Technology by Texas Instruments				
Aspect Ratio	4:3 Native, 16:9 Compatible				
Throw Ratio	Option 1 - Short Throw Lens: 0.8:1, Fixed zoom				
	Option 2 - STD Lens: 1.6 ~ 2.0:1, 1.25x zoom Option 3 - Long Throw Lens: 2.0 ~ 3.0:1, 1.5x zoom				
Projection Distance	Option 1: 0.5 ~ 3m				
1 Tojouton Blotanoo	Option 2: 1.5 ~ 7m				
	Option 3 : 2.0 ~ 20m				
Keystone Correction	± 30° Vertical				
Lens Shift Movement	-15 to +60% Vertical, ±10% Horizontal				
	Before installation please read EX785 install guide				
Aspect Ratio	4:3 Native, 16:9 compatible				
INPUTS	HDMI (HDCP) Audio supported DVI-D (HDCP) HDMI via adaptor				
	5BNC (RGBHV/YPbPr)				
	2 x 15 Pin D-Sub VGA SCART via adaptor				
	Component via adaptor				
	Component Video				
	S-Video 4 Pin Mini Din				
	Composite RCA Jack				
	3 x 3.5mm Mini Jack Audio computer inputs				
	2 x Stereo RCA Audio video inputs				
CONTROL	USB (remote mouse) RS232 9 Pin D-Sub & RJ45 – Network Control				
CONTROL	[Operation during standby mode - ECO standby must				
	be set to offl				
OUTPUT	PC 15 Pin D-Sub VGA (monitor loop-through)				
333.	[Supported through VGA 1 only. Operation during standby				
	mode - ECO standby must be set to off]				
	Audio Mini Jack				
	2 x +12v Trigger				
Audio	2 x 5W Speaker				
On Screen Display	17 Languages: English, German, French, Italian, Spanish,				
	Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian/Danish, Hungarian, Czech,				
	Turkish & Arabic				
Video Compatibility	PAL SECAM 625/576i\p, NTSC 525/480i\p,				
vidos compatibility	HD 720p/1080i/p				
Uniformity	85%				
Displayable Colours	134.2 Million				
Dimensions (W x D x H)	416 x 324 x 143 mm				
Weight	8.6 kg (without lens)				
Lamp Life ² Remote Control	2000/1500 hours (STD/BRIGHT mode)				
nemote Control	Full function remote with mouse control, laser pointer and direct source selecting				
Horizontal Scan Rate	15 – 100kHz				
Vertical Scan Rate	43 – 120Hz				
Power Supply	100 - 240V, 50 - 60Hz				
Power Consumption	430W BRIGHT mode < 1W Standby mode				
	390W STD mode < 1W Standby mode				
Operating Conditions Operating	5 - 35° C, 80% Humidity (Max), 3000m Altitude (Max)				
Security	One Kensington Lock Port, Password Protection,				
Standard Accessories	AC Power Cord, VGA Cable, full Function Remote,				
Statiualu Accessories	Batteries x 2, Lens cover, Quick Start Guide, CD User				
	Manual, Warranty Card, WEEE Card				
Optional Accessories	Short Throw Lens, STD Throw Lens, Long Throw Lens,				
	SCART to VGA adaptor, Component to VGA adaptor				
RoHS	Compliant				
Lamp Warranty	6 months or 1000 hours – whichever comes sooner				
Warranty	Warranty will vary by country. Please see				
	www.optomaeurope.com or ask your local supplier				
Colour Guarantee ³	for details 5 Years				
Imager Guarantee ⁴	5 Years				
3D Support	120Hz frame sequential 3D for resolutions up to 720p.				
os support	60Hz field sequential 3D for resolutions up to 480i				
3D Viewing	Requires Optoma DLP® Link™ active shutter glasses				
	sold separately				
3D Compatibility	The 3D features of the EX785 can only be used with				
	compatible 3D content and do not support 3D TV				
	broadcast systems, including the 3D SKY service in the				
	UK, or 3D Blu-ray. Support for these applications may				
-	be added in future using additional hardware.				

EASY TO USE REMOTE CONTROL

EX785 Remote Control


- 1 Laser
- 2 AV Mute
- 3 Vertical Keystone correction
- 4 Digital Zoom Control
- 5 Volume Control
- 6 Page Up/Down Control
- 7 Remote Mouse
- 8 Enter/Help
- 9 Brightness Adjustment
- 10 Direct Input Source Selection

EX785 Connections

- **11** DVI-D
- 12 HDMI (audio supported)
- 13 USB (remote mouse)
- **14** RJ45
- 15 VGA 1 SCART & Component
- 16 Audio In (VGA 1)
- 17 VGA In Component
- 18 Audio In (VGA 2) & DVI
- 19 VGA Out
- 20 Audio Out
- 21 5BNC
- 22 Audio In (BNC)
- 23 Component Video
- 24 Audio In
 - (Component Video)
- 25 RS232



- 26 S-Video
- 27 Composite Video
- 28 Audio In (S-Video & Composite)
- 29 +12v Trigger
- **30** +12v Trigger
- **31** Kensington™ Lock
- 32 Security Bar



Exceptional Connectivity / Multiple Terminals



Optoma Europe Ltd.

42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ

www.optoma.eu



